RNAV (GPS) RWY 10

KNOX COUNTY (4I3)

WAAS CH 63123 W10A	APP CRS 104°	Rwy Idg 5504 / TDZE 1191 / Apt Elev 1191

RNP APCH.

Baro-VNAV and VDP NA when using Newark altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 36°C (96°F). When Local altimeter setting not received, use Newark altimeter setting and increase all DA 86 feet and all MDA 100 feet and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C and D visibility ¼ mile. Rwy 10 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2800 direct PATIE and hold.

AWOS-3	COLUMBUS APP CON	CLNC DEL	UNICOM
126.05	125.95 317.775	119.45	123.05 (CTAF) L

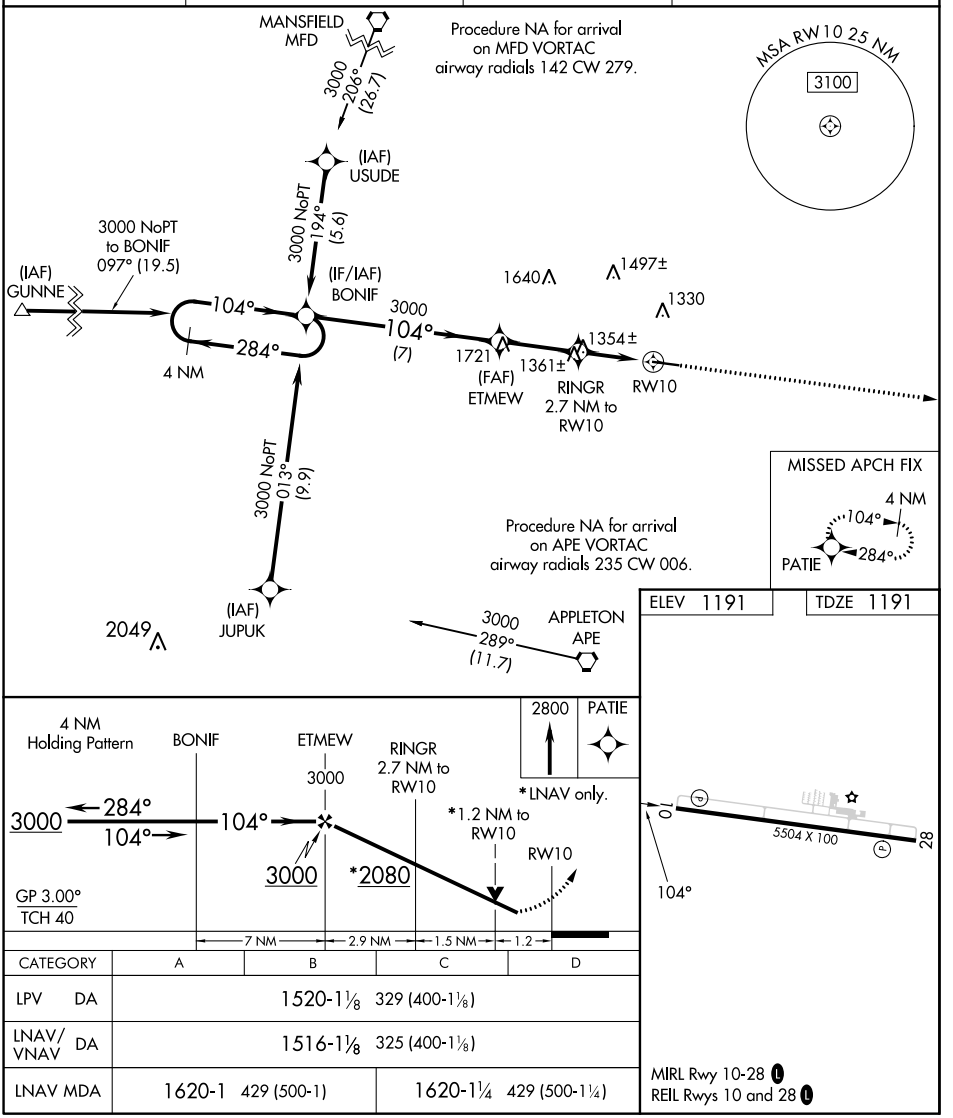

CATEGORY	A	B	C	D
LPV DA	1520-1⅛ 329 (400-1⅛)			
LNAV/VNAV DA	1516-1⅛ 325 (400-1⅛)			
LNAV MDA	1620-1 429 (500-1)		1620-1¼ 429 (500-1¼)	

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 28

KNOX COUNTY (4I3)

WAAS	APP CRS	Rwy Idg	5504
CH 69423	284°	TDZE	1189
W28A		Apt Elev	1191

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C.

MISSED APPROACH: Climb to 3000 direct BONIF and hold.

AWOS-3	COLUMBUS APP CON	CLNC DEL	UNICOM
126.05	125.95 317.775	119.45	123.05 (CTAF) L

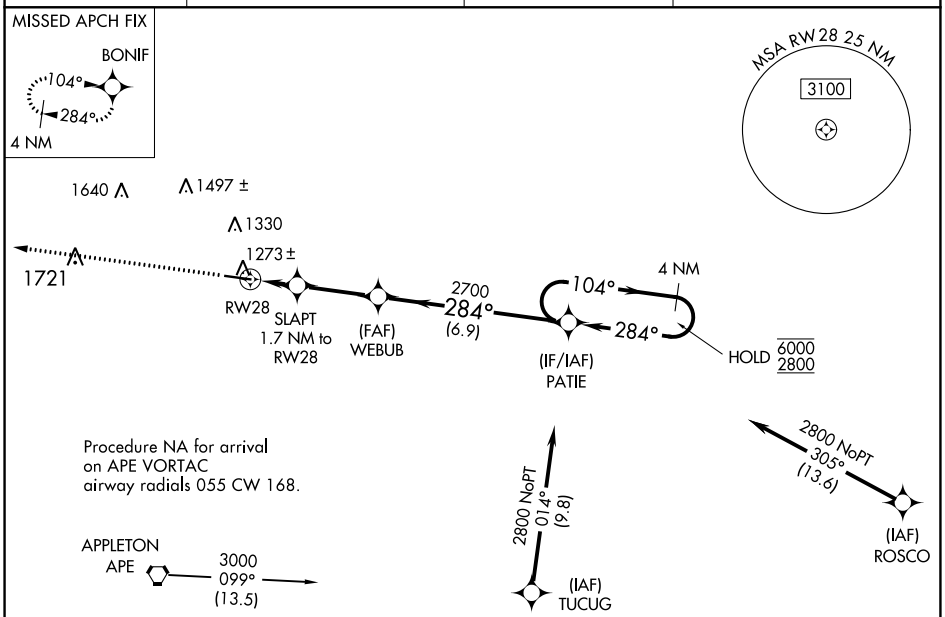

ELEV 1191 TDZE 1189



MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

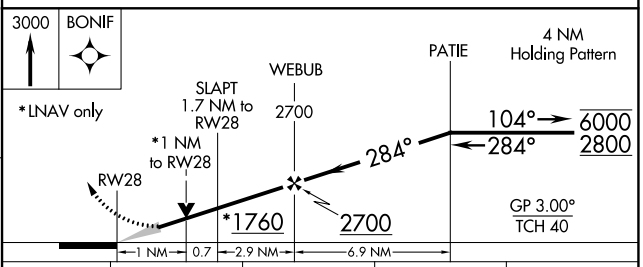

CATEGORY	A	B	C	D
LPV DA	1389-1 200 (200-1)			
LNAV/VNAV DA	1439-1 250 (300-1)			
LNAV MDA	1540-1 351 (400-1)			

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

VORTAC APE	APP CRS	Rwy Idg	N/A
116.7	022°	TDZE	N/A
Chan 114		Apt Elev	1192

VOR-A

KNOX COUNTY (4I3)

DME required.

MISSED APPROACH: Climb to 3000 then left turn direct APE VORTAC and hold.

AWOS-3	COLUMBUS APP CON	CLNC DEL	UNICOM
126.05	125.95 317.775	119.45	123.05 (CTAF) L

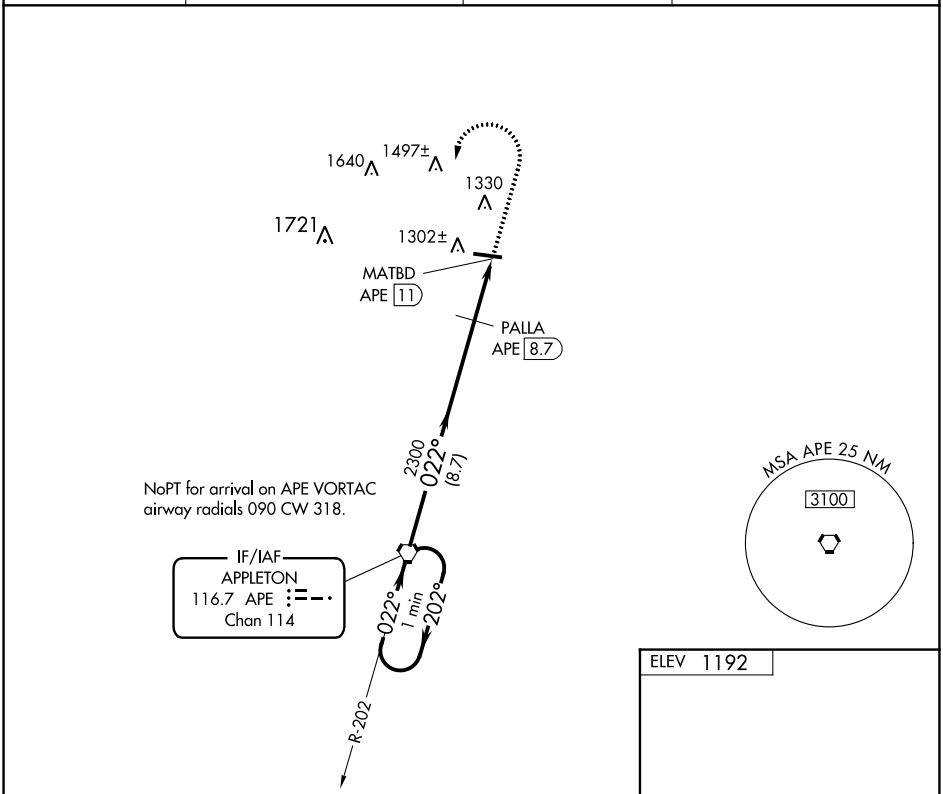

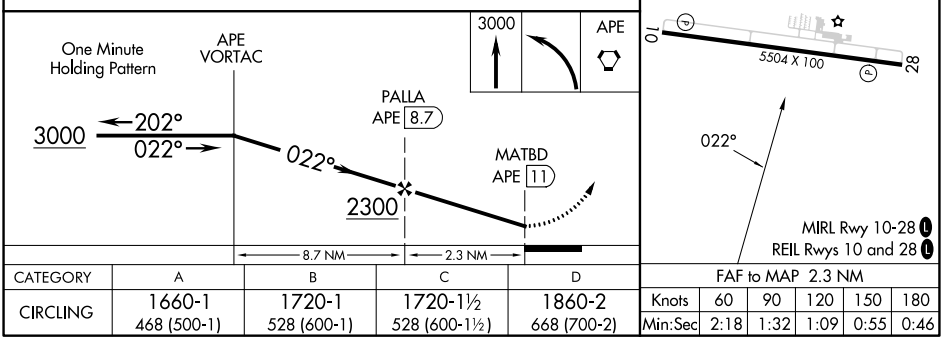

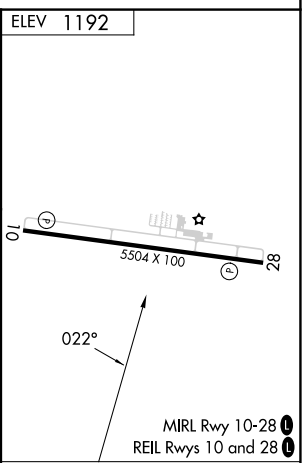

CATEGORY	A	B	C	D
CIRCLING	1660-1	1720-1	1720-1½	1860-2
	468 (500-1)	528 (600-1)	528 (600-1½)	668 (700-2)

FAF to MAP 2.3 NM

Knots	60	90	120	150	180
Min:Sec	2:18	1:32	1:09	0:55	0:46

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024