RNAV (GPS) RWY 18

FOLEY MUNI (5R4)

WAAS	APP CRS	Rwy Idg	3700
CH 45516	182°	TDZE	72
W18A		Apt Elev	74

Baro-VNAV NA. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA. Use Fairhope altimeter setting. When not received, use Gulf Shores altimeter setting and increase LPV DA to 397 feet, LNAV/VNAV DA to 547 feet, and all MDA 20 feet; increase LNAV Cat C visibility ⅛ mile and Circling Cat C visibility ¼ mile.

NA

MISSED APPROACH: Climb to 3000 direct WIBIK and hold, continue climb-in-hold to 3000.

CQF AWOS-3PT	PENSACOLA APP CON		UNICOM
118.425	118.6	380.6	123.05 (CTAF) L

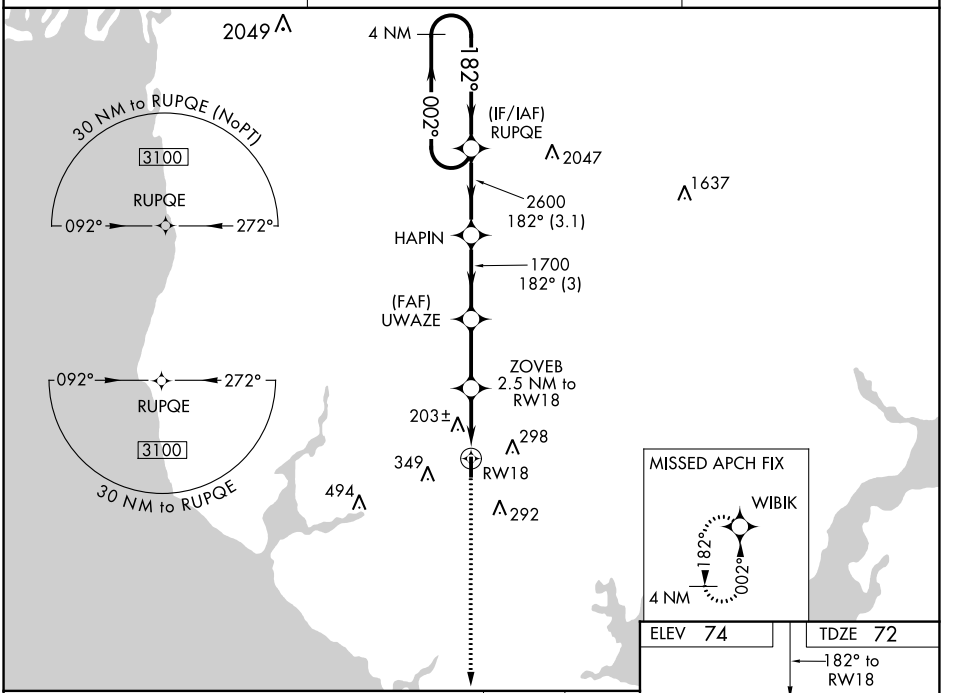

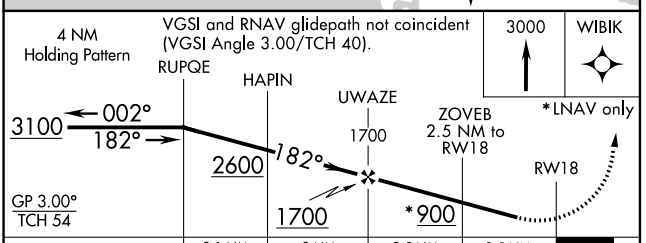

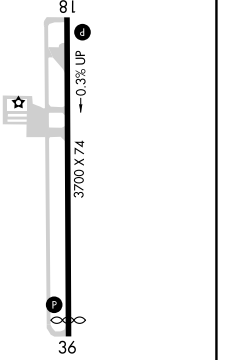

CATEGORY	A	B	C	D
LPV DA	393-1 321 (400-1)			NA
LNAV/VNAV DA	543-1⅝ 471 (500-1⅝)			NA
LNAV MDA	480-1 408 (500-1)		480-1⅛ 408 (500-1⅛)	NA
C CIRCLING	680-1 606 (700-1)		880-2¼ 806 (900-2¼)	NA

MIRL Rwy 18-36 L

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 36

FOLEY MUNI (5R4)

WAAS CH 93515 W36A	APP CRS 002°	Rwy Idg 3513 / TDZE 73 / Apt Elev 74

RNP APCH - GPS.

NA Procedure NA at night. Rwy 36 helicopter visibility reduction below 1 SM NA. Use Fairhope altimeter setting. When not received, use Gulf Shores altimeter setting and increase all MDA 20 feet; increase LP and LNAV Cat C visibility ⅛ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3100 direct RUPQE and hold, continue climb-in-hold to 3100.

CQF AWOS-3PT	PENSACOLA APP CON	UNICOM
118.425	118.6 380.6	123.05 (CTAF) L

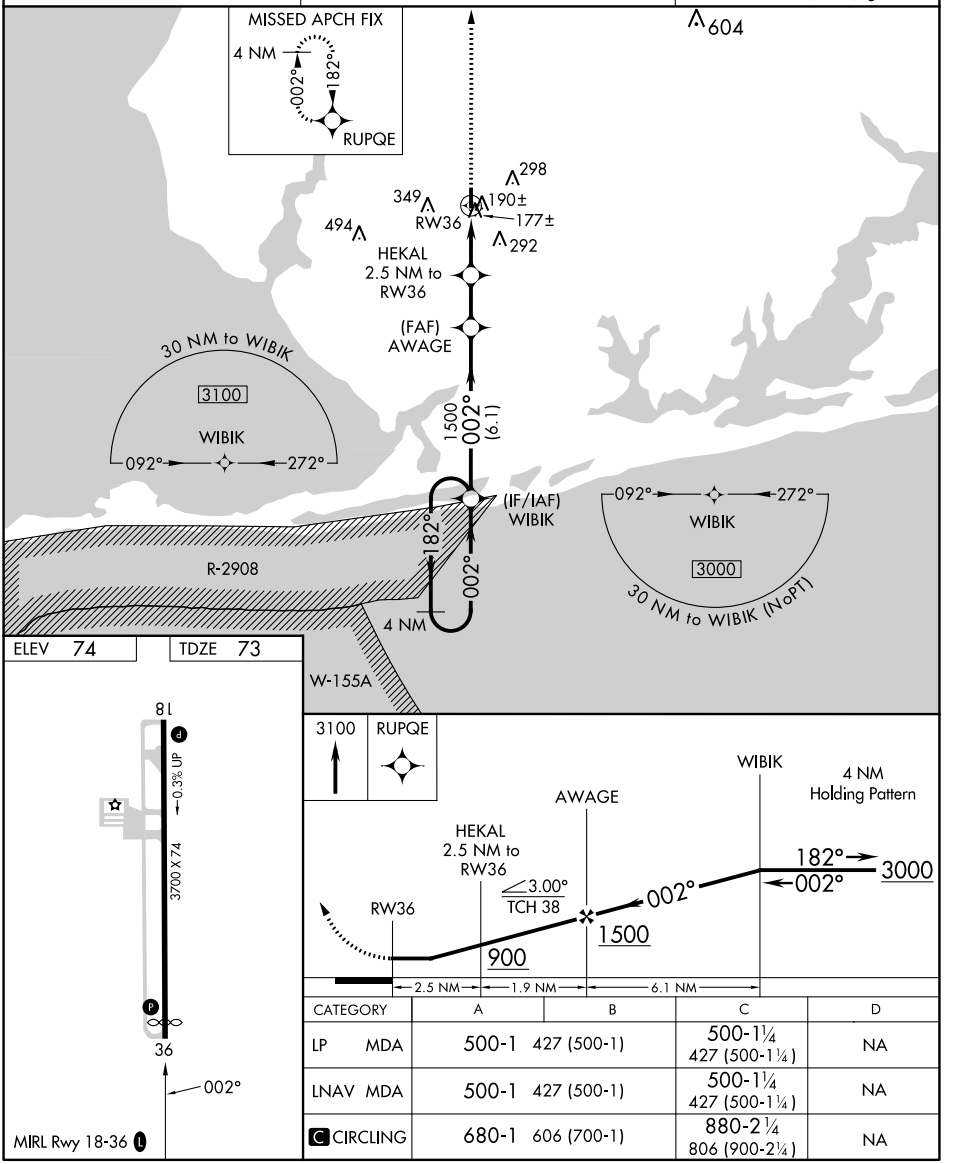

CATEGORY	A	B	C	D
LP MDA	500-1 427 (500-1)		500-1¼ 427 (500-1¼)	NA
LNAV MDA	500-1 427 (500-1)		500-1¼ 427 (500-1¼)	NA
C CIRCLING	680-1 606 (700-1)		880-2¼ 806 (900-2¼)	NA

SE-4, 22 FEB 2024 to 21 MAR 2024
SE-4, 22 FEB 2024 to 21 MAR 2024