

WAAS CH 70412 W36A	APP CRS 357°	Rwy Idg 6103 TDZE 995 Apt Elev 1016
--	------------------------	--


RNAV (GPS) RWY 36

ADA RGNL (ADH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Seminole altimeter setting. Circling Rwy 31 NA at night. Rwy 36 helicopter visibility reduction below ½ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Seminole altimeter setting: increase LPV DA to 1311 feet, LNAV/VNAV DA to 1600 feet and all MDA 80 feet. Increase LPV all Cats and LNAV Cats C and D visibility ¼ SM, increase LNAV/VNAV all Cats visibility to 2 ½ SM. Increase Circling Cats C/D visibility ½ SM.

MISSED APPROACH: Climb to 3000
direct FEKVO and hold.

AWOS-3 118.725	FORT WORTH CENTER 132.2 338.35	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

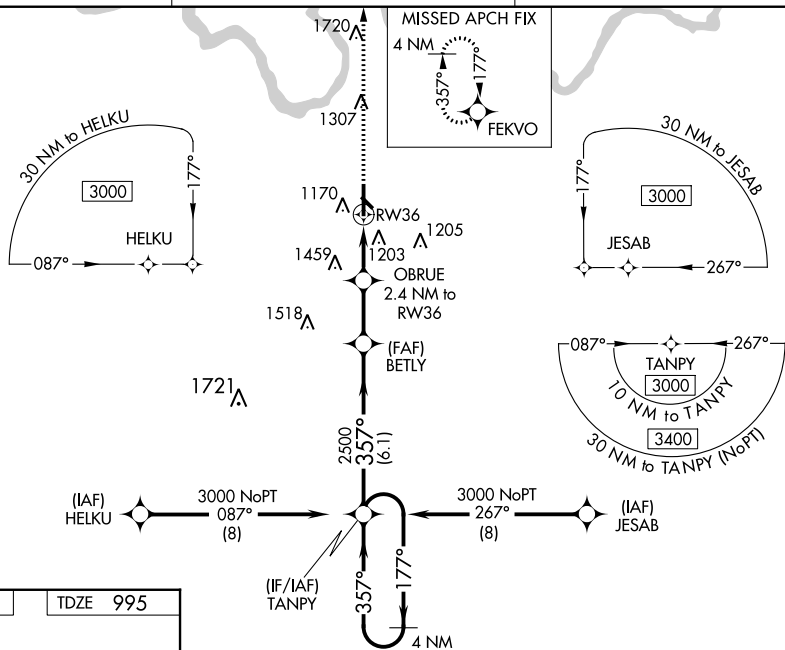

ELEV 1016		TDZE 995
-----------	--	----------

