

WAAS CH 53608 W17A	APP CRS 173°	Rwy Idg 4605 TDZE 1827 Apt Elev 1827
--	------------------------	---

RNAV (GPS) RWY 17

CURTIS FLD (BBD)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). When local altimeter setting not received, use Junction altimeter setting and increase all DA/MDA 120 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, and LNAV Cat C visibility ½ mile. VDP and Baro-VNAV NA when using Junction altimeter setting.

MISSED APPROACH: Climb to 4000 direct CEGOS and on track 228° to BREDY and hold.

AWOS-3 118.375	HOUSTON CENTER 132.35 317.5	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

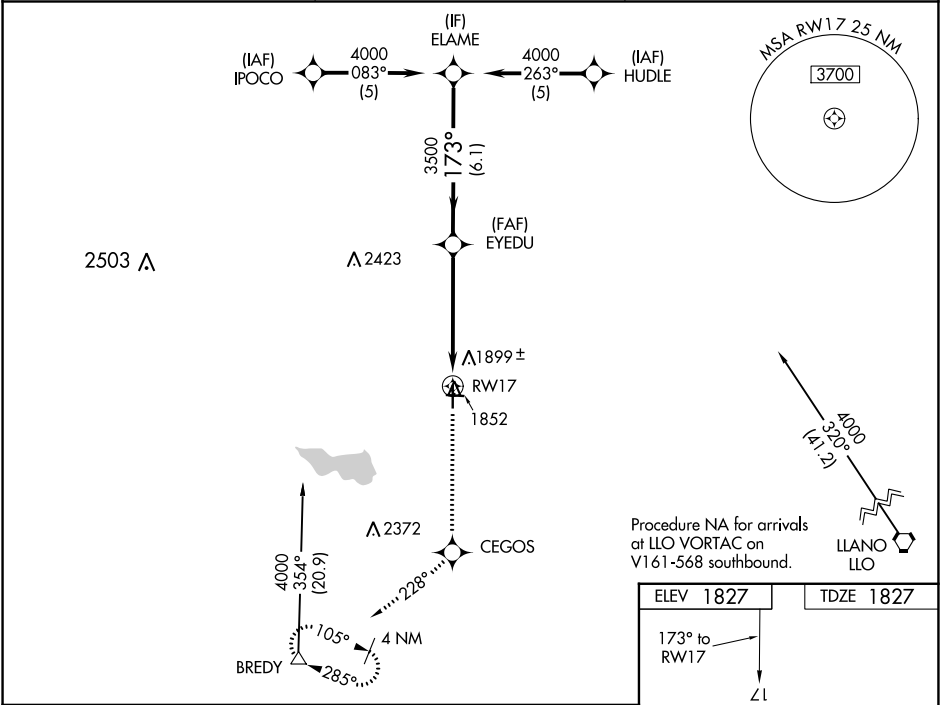

Procedure Turn NA		ELAME		4000	CEGOS	fr 228°	BREDY
GP 3.00° TCH 40°		EYEDU		*1.7 NM to RWY17			
				*LNAV only.			
				RWY17			
				6.1 NM 3.4 NM 1.7 NM			
CATEGORY		A	B	C	D		
LPV DA		2077-1 250 (300-1)				NA	
LNAV/VNAV DA		2191-1¼ 364 (400-1¼)				NA	
LNAV MDA		2420-1 593 (600-1)		2420-1½ 593 (600-1½)		NA	

