WAAS CH 93844 W27A	APP CRS 267°	Rwy ldg 3199 TDZE 752 Apt Elev 752

RNAV (GPS) RWY 27
BUFFALO-LANCASTER RGNL (BQR)

RNP APCH - GPS.

NA

Rwy 27 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. Use Buffalo Niagara Intl altimeter setting. Straight-in Rwy 27 at night, Circling Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3400 direct DMRIO and hold, continue climb-in-hold to 3400.

BUF ASOS	BUFFALO APP CON	UNICOM
135.35	126.15 263.125	123.05 (CTAF) L

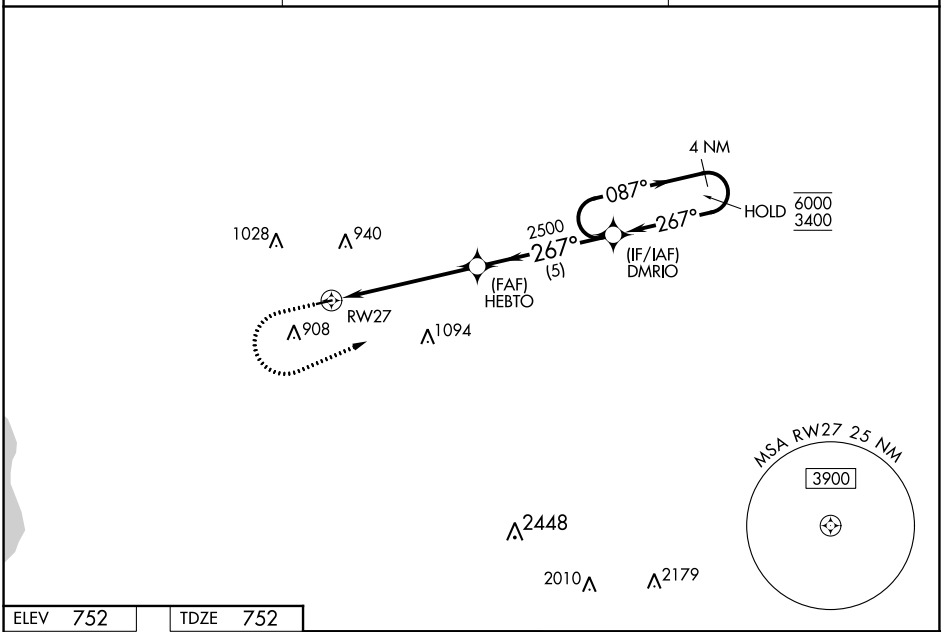

ELEV 752 TDZE 752

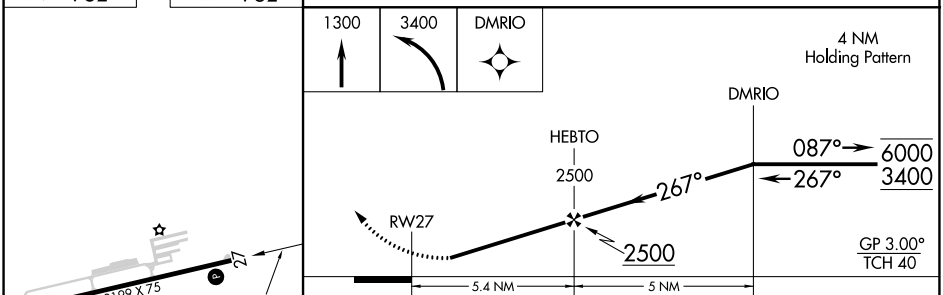

CATEGORY	A	B	C	D
LPV DA	1070-1 318 (400-1)		NA	
LNAV/VNAV DA	1164-1⅛ 412 (500-1⅛)		NA	
LNAV MDA	1320-1 568 (600-1)		NA	
CIRCLING	1320-1 568 (600-1)		NA	

MIRL Rwy 9-27 L
REIL Rwys 9 and 27 L

NE-2, 22 FEB 2024 to 21 MAR 2024

NE-2, 22 FEB 2024 to 21 MAR 2024