

APP CRS	Rwy Idg	6080
355°	TDZE	40
	Apt Elev	44

RNAV (RNP) Z RWY 36

CORPUS CHRISTI INTL (CRP)



▼


For uncompensated Baro-VNAV systems, procedure NA below -1°C (-31°F) or above 54°C (130°F). GPS required. For inop MALS, increase RNP 0.11 visibility all Cats to RVR 4000. For inop MALS, increase RNP 0.30 visibility all Cats to RVR 5900.

MALS

MISSED APPROACH: Climb to 2000 on track 355° to EXIKE and on track 294° to ATHIS and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON	CLNC DEL
126.8	120.9 348.725	119.4 257.8	121.9 269.15	118.55

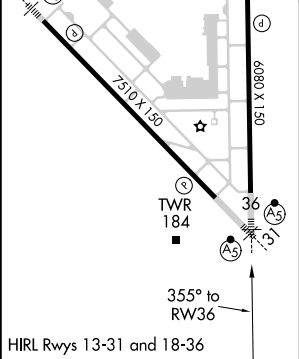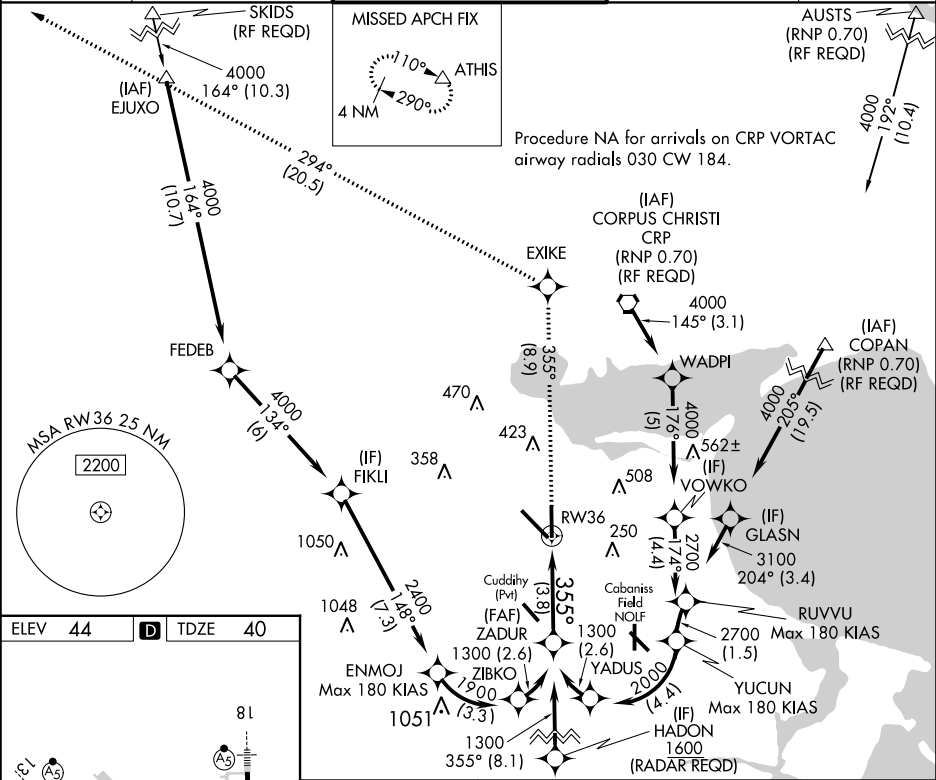

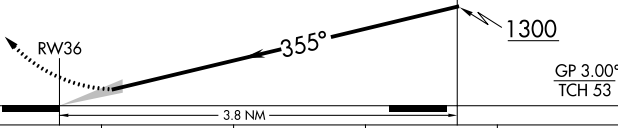2000	EXIKE	See Planview for multiple IF locations.		ZADUR
 tr 355°		tr 294°	ATHIS 	
				
GP 3.00° TCH 53				
CATEGORY	A	B	C	D
RNP 0.11 DA	290/24		250 (300-½)	
RNP 0.30 DA	400/34		360 (400-¾)	
AUTHORIZATION REQUIRED				