
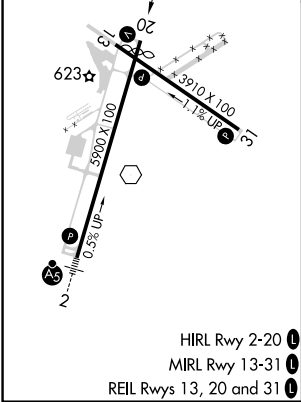


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>87116</b><br><b>W20A</b> | APP CRS<br><b>205°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5600</b><br><b>568</b><br><b>571</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 20  
DANVILLE RGNL (DAN)

|                                                                                                                                                                                                                                                                                                                                                                                                               |                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH.<br>Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting. | MISSED APPROACH: Climb to 2500 direct LANTA and hold. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|

|                        |                                          |                                  |
|------------------------|------------------------------------------|----------------------------------|
| ASOS<br><b>128.125</b> | WASHINGTON CENTER<br><b>124.05 352.0</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |
|------------------------|------------------------------------------|----------------------------------|

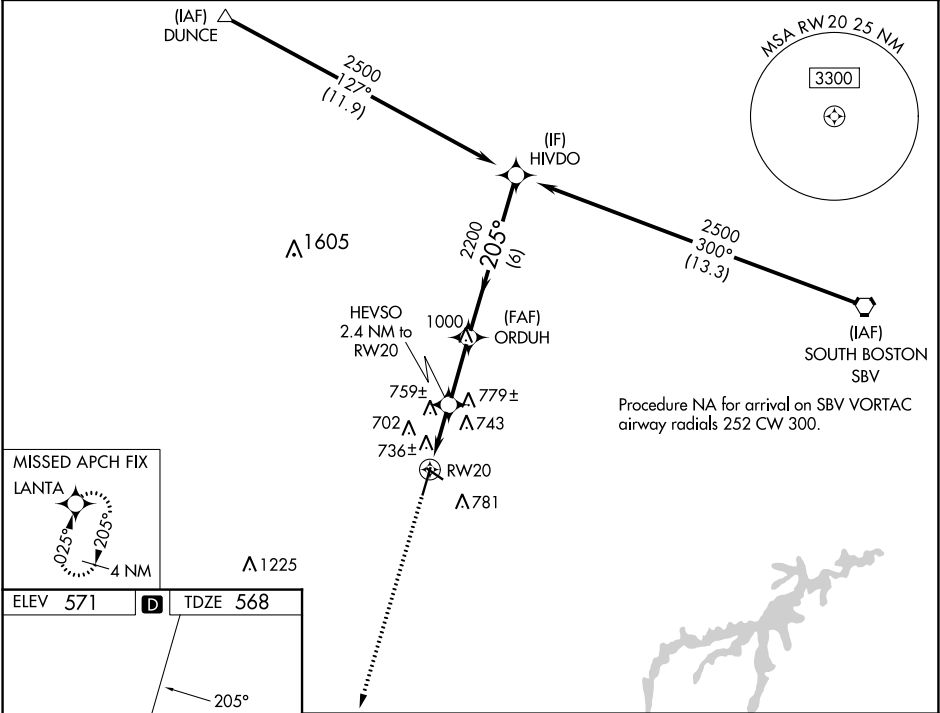

|                           |       |                         |                      |                      |
|---------------------------|-------|-------------------------|----------------------|----------------------|
| 2500                      | LANTA | HEVSO<br>2.4 NM to RW20 | ORDUH<br>2200        | HIVDO<br>2500        |
| *LNAV only.               |       |                         |                      |                      |
| 1.3 NM to RW20            |       |                         |                      |                      |
| 1380*                     |       |                         |                      |                      |
| 2200                      |       |                         |                      |                      |
| 205°                      |       |                         |                      |                      |
| Procedure Turn NA         |       |                         |                      |                      |
| GP 3.00°                  |       |                         |                      |                      |
| TCH 50                    |       |                         |                      |                      |
| 1.3 NM 1.1 NM 2.5 NM 6 NM |       |                         |                      |                      |
| CATEGORY                  | A     | B                       | C                    | D                    |
| LPV                       | DA    | 768-1 200 (200-1)       |                      |                      |
| LNAV/VNAV                 | DA    | 1026-1½ 458 (500-1½)    |                      |                      |
| LNAV                      | MDA   | 1020-1 452 (500-1)      | 1020-1¼ 452 (500-1¼) | 1020-1½ 452 (500-1½) |

NE-3, 22 FEB 2024 to 21 MAR 2024

NE-3, 22 FEB 2024 to 21 MAR 2024