
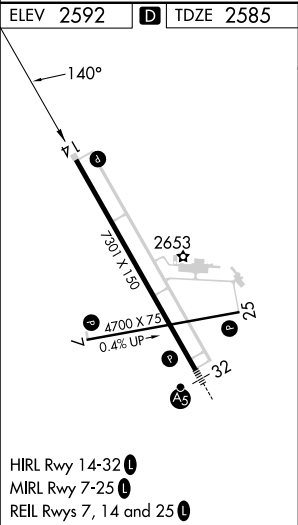


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct LUFGI and hold.

ASOS 118.375	MINNEAPOLIS CENTER 124.25 236.825	UNICOM 123.0 (CTAF) 0
-----------------	--------------------------------------	--------------------------

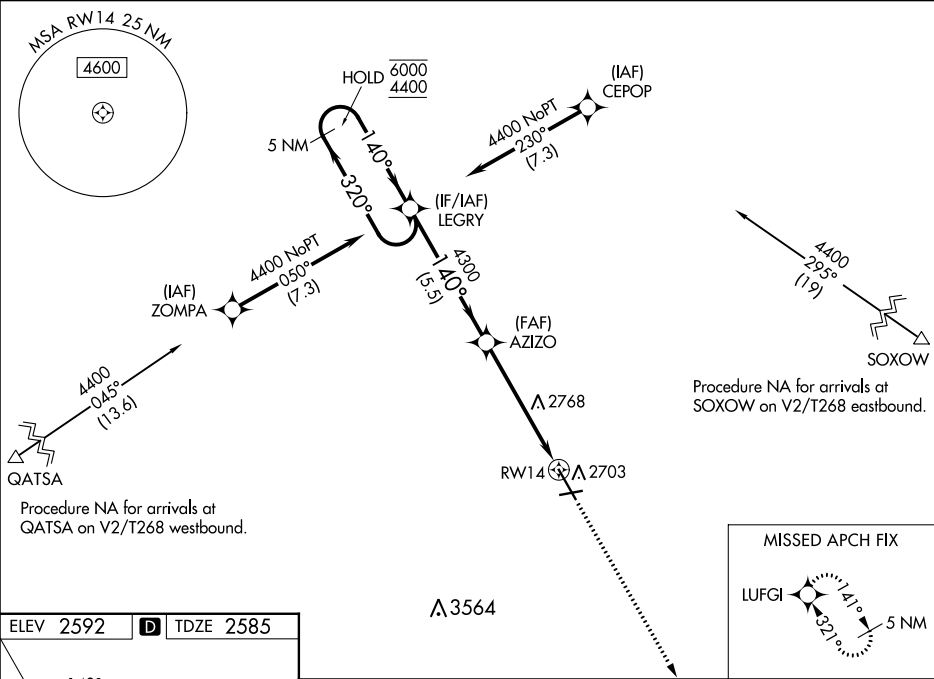

5 NM Holding Pattern				5000	LUFGI
LEGRY					
AZIZO					
1.2 NM to RW14					
RW14					
5.5 NM				4 NM	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	2785-3/4 200 (200-3/4)				
LNAV/VNAV DA	2835-3/4 250 (300-3/4)				
LNAV MDA	3020-1 435 (500-1)		3020-1 1/4 435 (500-1 1/4)		
CIRCLING	3060-1 468 (500-1)		3120-1 1/2 528 (600-1 1/2)	3200-2 608 (700-2)	