

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Inop table does not apply to LPV DA. For inop MALSF, increase LNAV/VNAV all Cats and LNAV Cats A and B visibility to RVR 5500 and Cats C/D/E visibility to 1½ miles. Circling NA west of Rwy 17R-35L.

MALSF

MISSED APPROACH: Climb to 3100 direct AZTIB and on track 125° to WATFO and hold.

ATIS 135.575 269.9	HOUSTON APP CON 134.45 284.0	ELLINGTON TOWER 126.05 253.5	GND CON 121.6 275.8
-----------------------	---------------------------------	---------------------------------	------------------------

RADAR REQUIRED

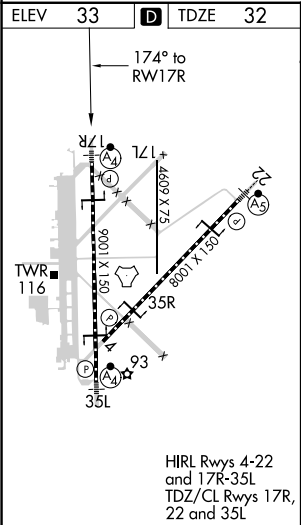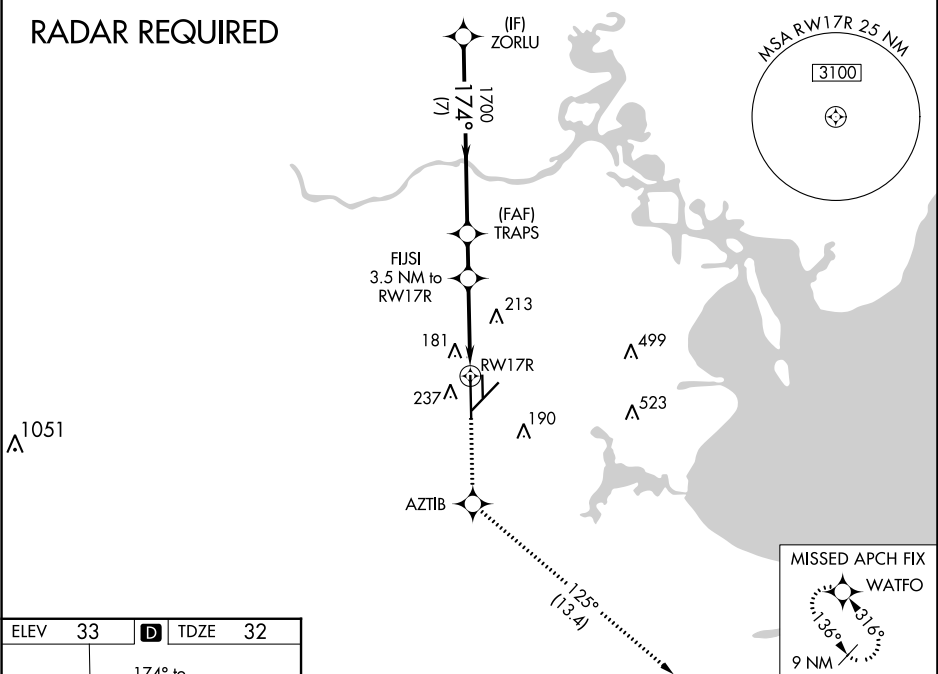

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).					3100	AZTIB	fr 125°	WATFO
ZORLU					2000	TRAPS 1700	FUJSI 3.5 NM to RW17R	*LNAV only.
GP 3.00° TCH 52					174°	1700	*1180	*1.4 NM to RW17R
7 NM					1.6 NM	2.2 NM	1.4 NM	
CATEGORY	A	B	C	D	E			
LPV DA	232/40				200 (200-¾)			
LNAV/VNAV DA	363/40				331 (400-¾)			
LNAV MDA	500/40	468 (500-¾)	500/60 468 (500-1¼)					
CIRCLING	500-1	467 (500-1)	580-1½ 547 (600-1½)	640-2 607 (700-2)	700-2¼ 667 (700-2¼)			