
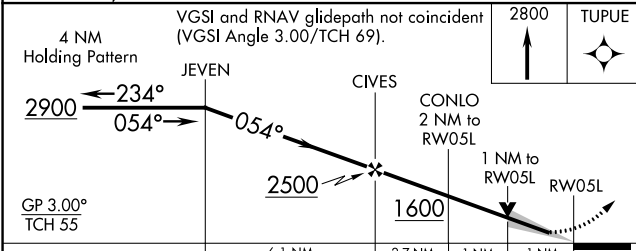



WAAS CH 86515 W05B	APP CRS 054°	Rwy Idg TDZE 916 Apt Elev 926
--	------------------------	---

RNAV (GPS) RWY 5L
PIEDMONT TRIAD INTL (GSO)

RNP APCH - GPS.			ALSF-2 	MISSED APPROACH: Climb to 2800 direct TUPUE and hold.
▼ For inop ALS, increase LNAV Cat D visibility to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Simultaneous approach authorized with ILS or LOC Rwy 5R, ILS Rwy 5R (CAT II). Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations.				
▲				
D-ATIS 128.55	GREENSBORO APP CON 124.35 269.225 (250°-049°) 126.6 327.075 (050°-249°)	GREENSBORO TOWER 119.1 290.325	GND CON 121.9 348.6	CLNC DEL 121.75

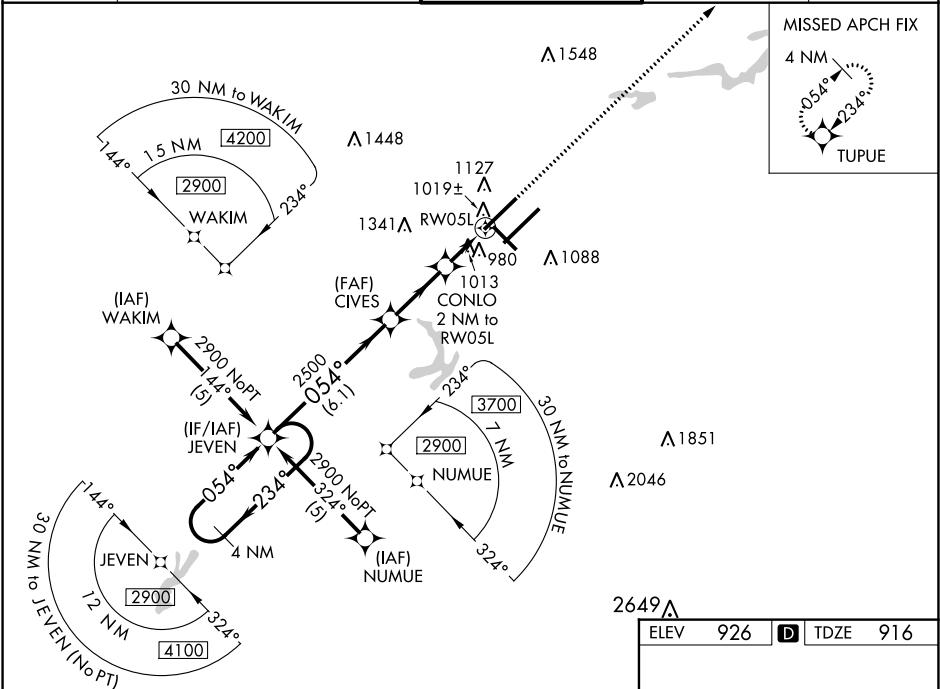

CATEGORY	A	B	C	D
LPV DA	1116/18		200 (200-½)	
LNAV/VNAV DA	1367/50		451 (500-1)	
LNAV MDA	1300/24 384 (400-½)		1300/35 384 (400-¾)	1300/50 384 (400-1)
CIRCLING	1440-1 514 (600-1)		1700-2¼ 774 (800-2¼)	1700-2½ 774 (800-2½)

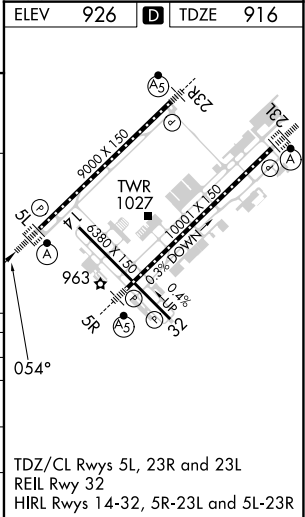

SE-2, 22 FEB 2024 to 21 MAR 2024

SE-2, 22 FEB 2024 to 21 MAR 2024