


LUKE DEP CON★
125.45 263.125
PHOENIX DEP CON
120.7 239.0
ATIS
118.35
GND CON
121.7
GOODYEAR TOWER★
120.1 239.3

TOP ALTITUDE:
ASSIGNED BY ATC

RNAV 1 - GPS.
RADAR required.

- NOTE: Turbojets and turboprops only.
NOTE: Aircraft requesting FL220 and below must file BLYTHE Transition.
NOTE: Turbojets landing LAX, file WLVRN Transition.
NOTE: Aircraft landing other than LAX and turboprops landing at LAX: Requesting FL240 and above, file HRRBR Transition.
NOTE: Aircraft departing KGEU and KGYR ATC assigned only.

TAKEOFF MINIMUMS
Rwys 3, 21: Standard.

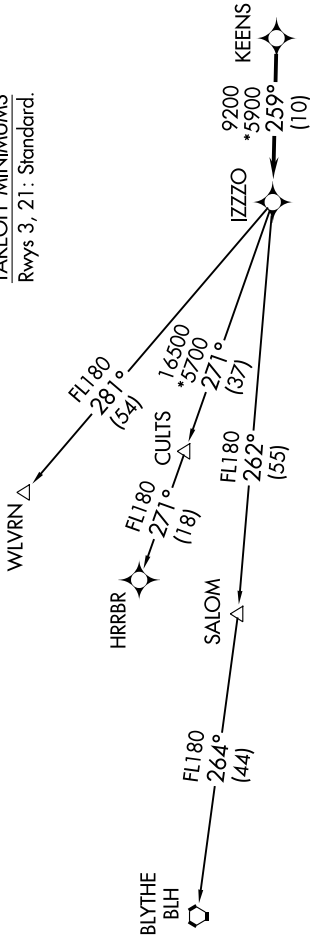

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 3: Climb on heading 028° or as assigned by ATC, thence. . .
TAKEOFF RUNWAY 21: Climb on heading 228° or as assigned by ATC, thence. . .
... for RADAR vectors to KEENS, then on track 259° to IZZO, then on (transition).
Maintain ATC assigned altitude, expect filed altitude 3 minutes after departure.

BLYTHE TRANSITION (IZZZO8.BLH)
HRRBR TRANSITION (IZZZO8.HRRBR)
WLVRN TRANSITION (IZZZO8.WLVRN)

NOTE: Chart not to scale.