

WAAS CH 82643 W14A	APP CRS 138°	Rwy Idg TDZE Apt Elev	5201 1393 1396
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 14


DETROIT LAKES/WETHING FLD (DTL)

RNP APCH.


Circling NA to Rwy 18 and 36. Baro-VNAV and VDP NA when using Park Rapids altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Park Rapids altimeter setting: increase DA to 1728 feet and all visibilities ¼ SM, increase all MDA 100 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3100 direct HUSES and hold.

AWOS-3PT 119.075	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

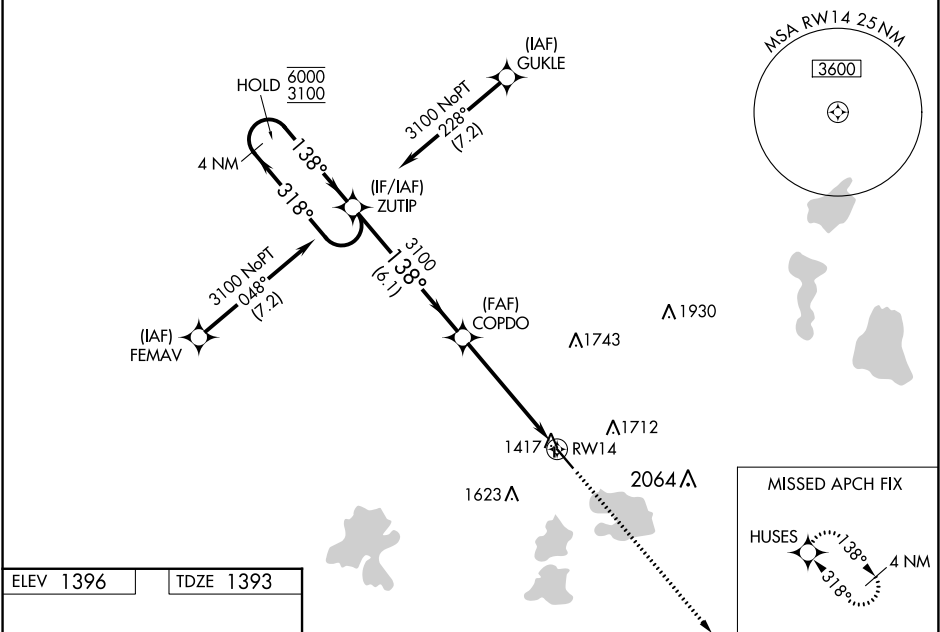

ELEV 1396	TDZE 1393
-----------	-----------

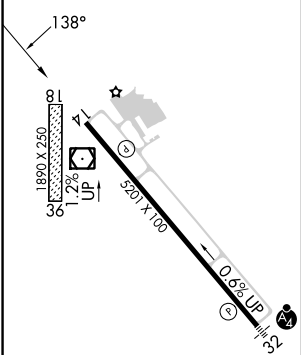

4 NM Holding Pattern		ZUTIP	COPDO	3100	HUSES
6000 3100		← 318° 138° →	138°	3100	
GP 3.00° TCH 43		*1.1 NM to RWY 14			
		6.1 NM	4.1 NM	1.1	
CATEGORY	A	B	C	D	
LPV DA	1643-1		250 (300-1)		
LNAV/VNAV DA	1643-1		250 (300-1)		
LNAV MDA	1780-1 387 (400-1)		1780-1½ 387 (400-1½)		
CIRCLING	1820-1 424 (500-1)	1860-1 464 (500-1)	2080-2 684 (700-2)	2140-2½ 744 (800-2½)	

WAAS CH 86704 W32A	APP CRS 318°	Rwy Idg TDZE 1372 Apt Elev 1396
--	------------------------	---

RNAV (GPS) RWY 32

DETROIT LAKES/WETHING FLD (DTL)

RNP APCH-GPS.

⚠


⚠

Circling NA to Rwy 18 and 36. Inop table does not apply to LPV.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all
Cats visibility to ½ SM.


MALSF

MISSED APPROACH: Climb to 3100
direct ZUTIP and hold.

AWOS-3PT 119.075	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

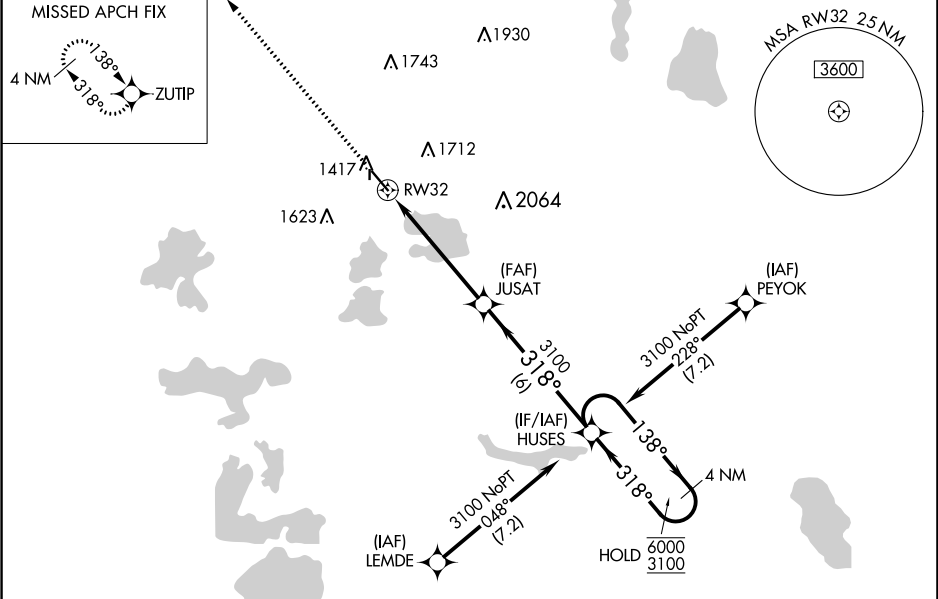

ELEV 1396	TDZE 1372
-----------	-----------

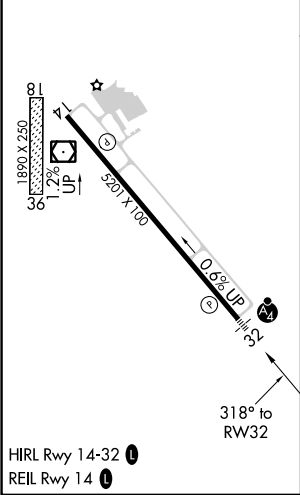

3100 $\uparrow$

ZUTIP

JUSAT
 3100

HUSES
 3100

1.4 NM to RW32

4 NM Holding Pattern

GP 3.00°
 TCH 42

CATEGORY	A	B	C	D
LPV DA	1622-¾ 250 (300-¾)			
LNAV/VNAV DA	1656-¾ 284 (300-¾)			
LNAV MDA	1860-¾ 488 (500-¾)		1860-1⅛ 488 (500-1⅛)	
CIRCLING	1860-1 464 (500-1)		2080-2 684 (700-2)	2140-2½ 744 (800-2½)

VOR/DME DTL	APP CRS	Rwy Idg	5201
111.2	314°	TDZE	1372
Chan 49		Apt Elev	1396

VOR RWY 32

DETROIT LAKES/WETHING FLD (DTL)


NA

Circling NA to Rwy's 18 and 36. VDP NA with Park Rapids altimeter setting. When local altimeter setting not received, use Park Rapids altimeter setting and increase all MDA 100 feet and visibility Cat A ¼ SM, Cats C and D ½ SM and Circling Cats A and C ¼ SM, Cat D ½ SM. DUWIZ fix minimums: increase visibility Cats C and D ¼ SM. For inop ALS, increase S-32 Cats C and D visibility to 2½ SM. Inop table does not apply to S-32 Cats C and D when using Park Rapids altimeter setting.


MALSF

MISSED APPROACH: Climb to 2500 then climbing left turn to 3200 direct DTL VOR/DME and hold, continue climb-in-hold 3200.

AWOS-3PT 119.075	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF)
---------------------	-----------------------------------	------------------------

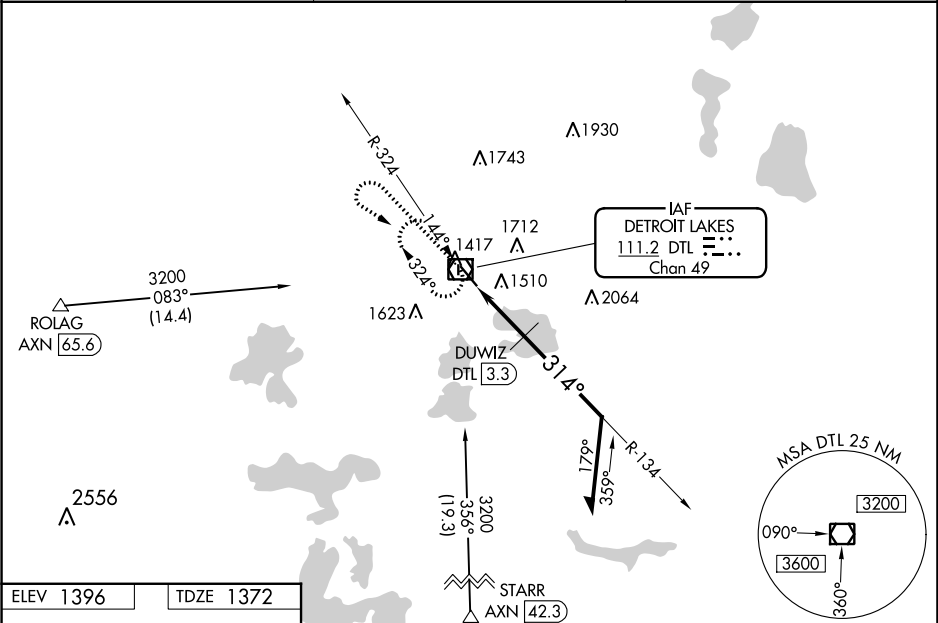

ELEV 1396	TDZE 1372
-----------	-----------

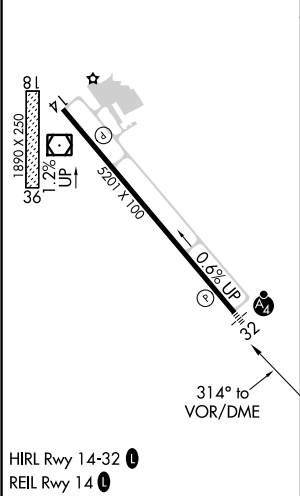

2500	3200	DTL	DTL VOR/DME	*2300 when using Park Rapids altimeter setting.
↑	↶			
1734° DUWIZ DTL 3.3 314° 3200 2200* 1.9 3.00° TCH 42 1.1 NM 1.4 NM				
Remain within 10 NM				
CATEGORY	A	B	C	D
S-32	2200-¾ 828 (900-¾)	2200-1 828 (900-1)	2200-2 828 (900-2)	828 (900-2)
CIRCLING	2200-1 804 (900-1)	2200-1¼ 804 (900-1¼)	2200-2½ 804 (900-2½)	804 (900-2½)
DUWIZ FIX MINIMUMS				
S-32	1760-¾ 388 (400-¾)	1760-7/8 388 (400-7/8)	1760-7/8 388 (400-7/8)	388 (400-7/8)
CIRCLING	1820-1 424 (500-1)	1860-1 464 (500-1)	2080-2 684 (700-2)	2140-2½ 744 (800-2½)