

WAAS CH 42613 W04A	APP CRS 043°	Rwy Idg TDZE 2288 Apt Elev 2302
--	------------------------	---

RNAV (GPS) RWY 4

GREENBRIER VALLEY (LWB)

RNP APCH.

▼


▲

Rwy 4 helicopter visibility reduction below $\frac{3}{4}$ NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
For inop ALS, increase LNAV Cats A/B visibilities to 1 SM, Cats C/D to $\frac{1}{2}$ SM, and increase LPV all Cats visibilities to $\frac{7}{8}$ SM.


MALSR

MISSED APPROACH:
Climb to 6300 direct HODFU and hold, continue climb-in-hold to 6300.

ATIS ★ 121.4	WASHINGTON CENTER 134.4 353.9	LEWISBURG TOWER★ 118.9 (CTAF) 0	GND CON 121.9	CLNC DEL 125.725 (When twr closed)	UNICOM 122.95
------------------------	---	---	-------------------------	---	-------------------------

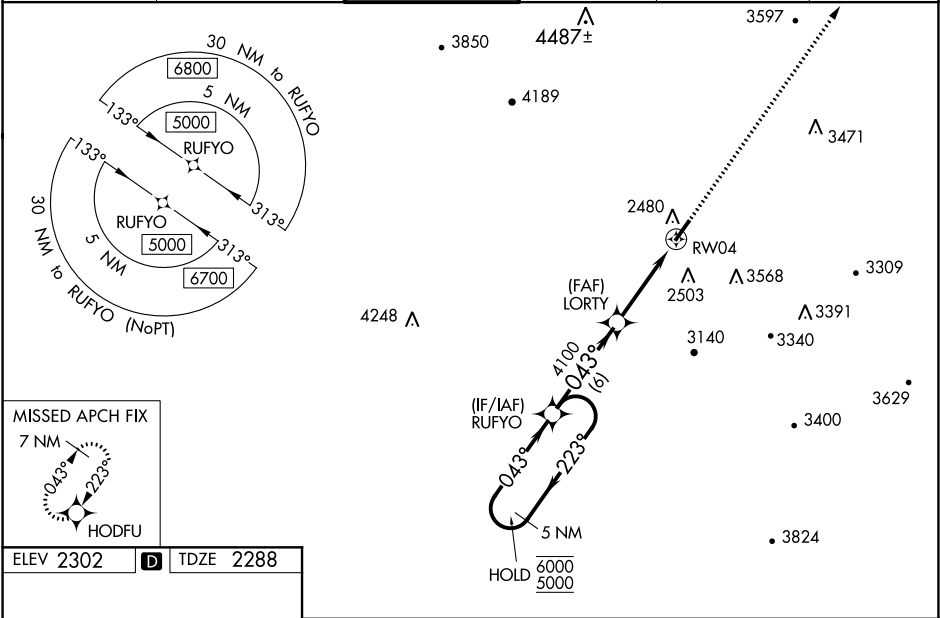

ELEV 2302	D	TDZE 2288
-----------	----------	-----------

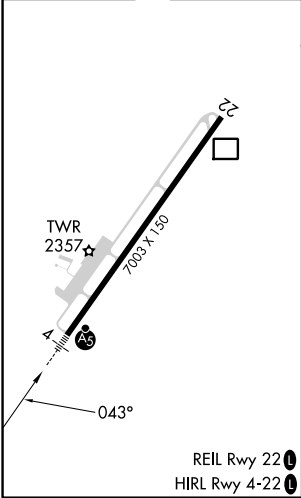

5 NM Holding Pattern				6300	HODFU
RUFYO				↑	✦
GP 3.00° TCH 51				*LNAV only.	
LORTY				*1.3 NM to RW04	
RW04				↓	
6 NM				4.2 NM	
1.3					
CATEGORY	A	B	C	D	
LPV DA		2559- $\frac{3}{4}$	271 (300- $\frac{3}{4}$)		
LNAV/VNAV DA		2738- $\frac{7}{8}$	450 (500- $\frac{7}{8}$)		
LNAV MDA	2760- $\frac{3}{4}$	472 (500- $\frac{3}{4}$)	2760-1	472 (500-1)	
CIRCLING	2840-1 538 (600-1)	3040-1 738 (800-1)	3280-3 978 (1000-3)	3680-3 1378 (1400-3)	