

WAAS CH 53307 W18B	APP CRS 180°	Rwy Idg 9000 TDZE 301 Apt Elev 341
--	------------------------	---

RNAV (GPS) Z RWY 18L
MEMPHIS INTL (MEM)

RNP APCH - GPS.	
-----------------	--

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1% SM and LNAV Cat C/D visibility to 1% SM.

MALSR




MISSED APPROACH: Climb to 900 then climbing left turn to 5000 direct KEEZE and hold, continue climb-in-hold to 5000.

MEMPHIS APP CON		MEMPHIS TOWER		GND CON		CLNC DEL
119.1	291.6 (176°-355°)	(Rwy 9-27)	118.3 257.8	(Rwy 9-27)	121.0 379.2	
		(Rwys 18C-36C, 18L-36R)	119.7 257.8	(Rwys 18C-36C, 18L-36R)	121.9 379.2	
125.8	338.3 (356°-175°)	(Rwy 18R-36L)	128.425 257.8	(Rwy 18R-36L)	121.65 379.2	

D-ATIS
127.75

CPDLC

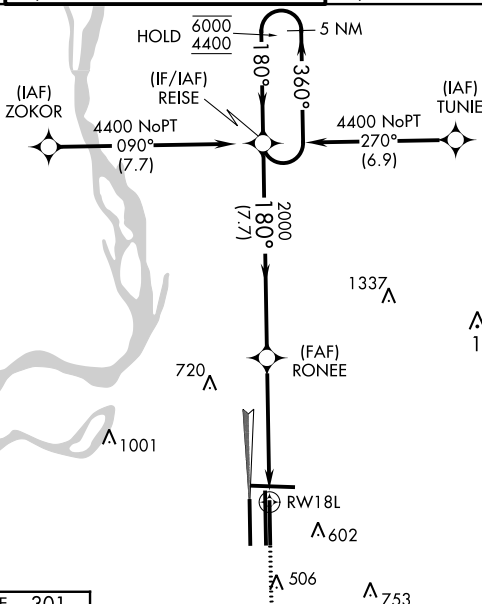

ELEV 341	TDZE 301
----------	----------

