

WAAS CH 93530 W04A	APP CRS 040°	Rwy Idg TDZE 1168 Apt Elev 1171
--	------------------------	---


RNAV (GPS) RWY 4

IOWA COUNTY (MRJ)

Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV all Cats visibility ½ mile and LNAV/VNAV all Cats visibility ¼ mile, increase all MDA 60 feet, and LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3600 direct ZOBIK and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

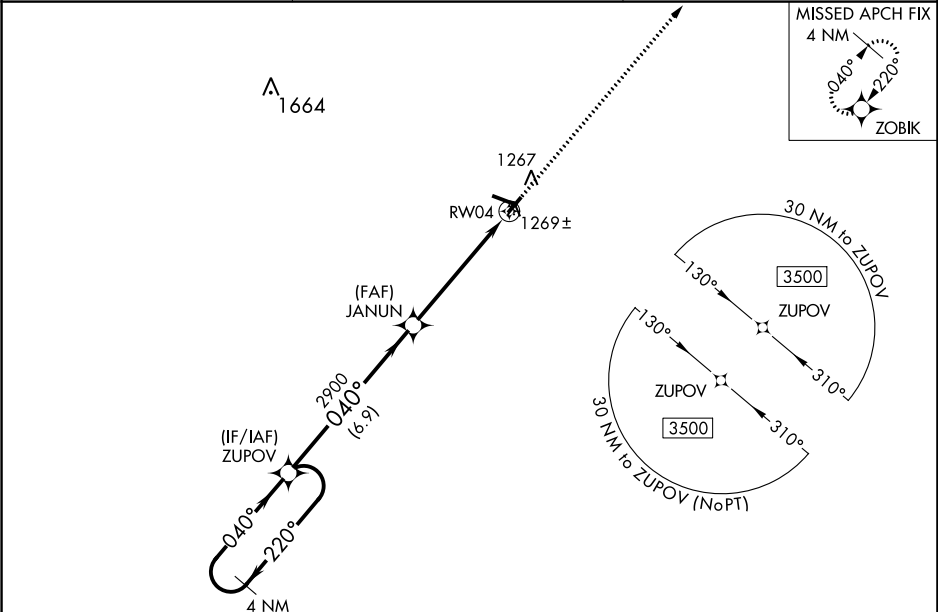

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		ELEV 1171	TDZE 1168
ZUPOV		JANUN		* LNAV only	
3500 ← 220° 040° →		2900		* 1.2 NM to RWY 04	
GP 3.00° TCH 40		2900		RWY 04	
		6.9 NM		4.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1368-¾		200 (200-¾)	NA	
LNAV/VNAV DA	1443-⅞		275 (300-⅞)	NA	
LNAV MDA	1580-1	412 (500-1)	1580-1½ 412 (500-1½)	NA	
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA	