


RNAV (GPS) Y RWY 23
RHODE ISLAND TF GREEN INTL (PVD)

T For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 1700 then climbing right turn to 2500 direct FOSTY and hold.

D-ATIS 124.2	PROVIDENCE APP CON ★ 123.675 244.875	PROVIDENCE TOWER ★ 120.7 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 348.6
-----------------	---	--	------------------------	--------------------------

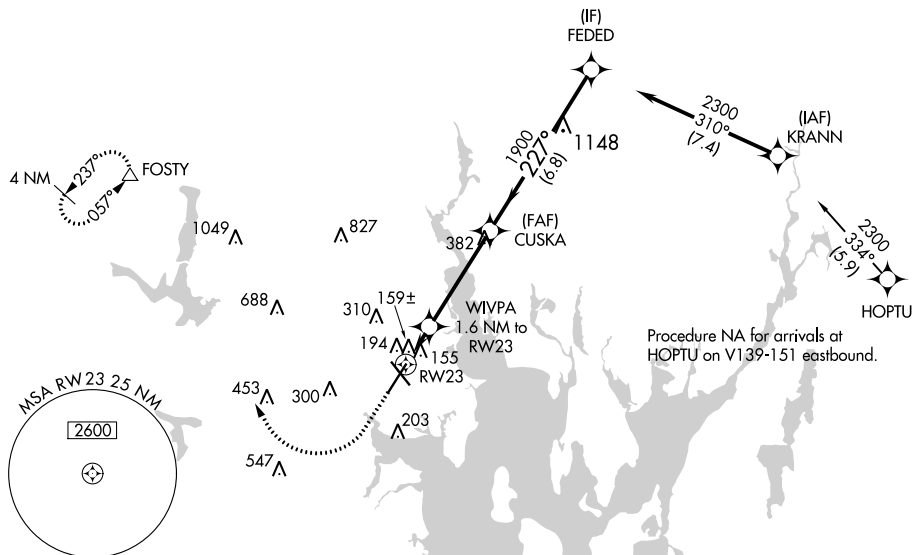

ELEV 54		TDZE 50
---------	---	---------

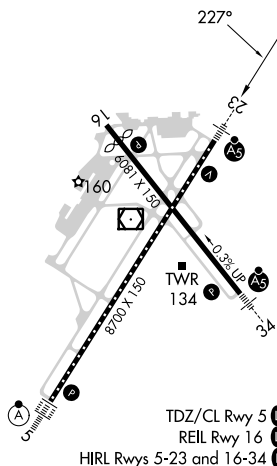

1700 2500 FOSTY VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 41).				
*LNNAV only	WVPA 1.6 NM to RW23 CUSKA 1900 FEDED 2300 GP 3.00° TCH 51			
CATEGORY	A	B	C	D
LPV DA **	250/24		200 (200-½)	
LNNAV/VNAV DA	346/24		296 (300-½)	
LNNAV MDA	460/24	410 (500-½)	460/40	410 (500-¾)
CIRCLING	560-1 506 (600-1)	640-1 586 (600-1)	640-1½ 586 (600-1½)	860-2½ 806 (900-2½)