

WAAS CH 82013 W13A	APP CRS 133°	Rwy Idg TDZE Apt Elev	7500 1031 1031
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ST CLOUD RGNL (STC)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 47°C. VDP and Baro-VNAV NA when using Little Falls altimeter setting. When local altimeter setting not received, use Little Falls altimeter setting; increase LPV DA to 1307 feet, LNAV/VNAV DA to 1531 feet and visibility LNAV/VNAV ¼ SM all Cats; increase all MDA 80 feet and visibility Circling Cat C and D ¼ SM. For inoperative MALSR, increase LNAV Cat D visibility ¼ mile. For inop MALSR when using Little Falls altimeter setting, increase LPV all Cats visibility ½ mile.


MALSR

▲


AG

MISSED APPROACH:
Climb to 3000 direct
ZUXAL and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

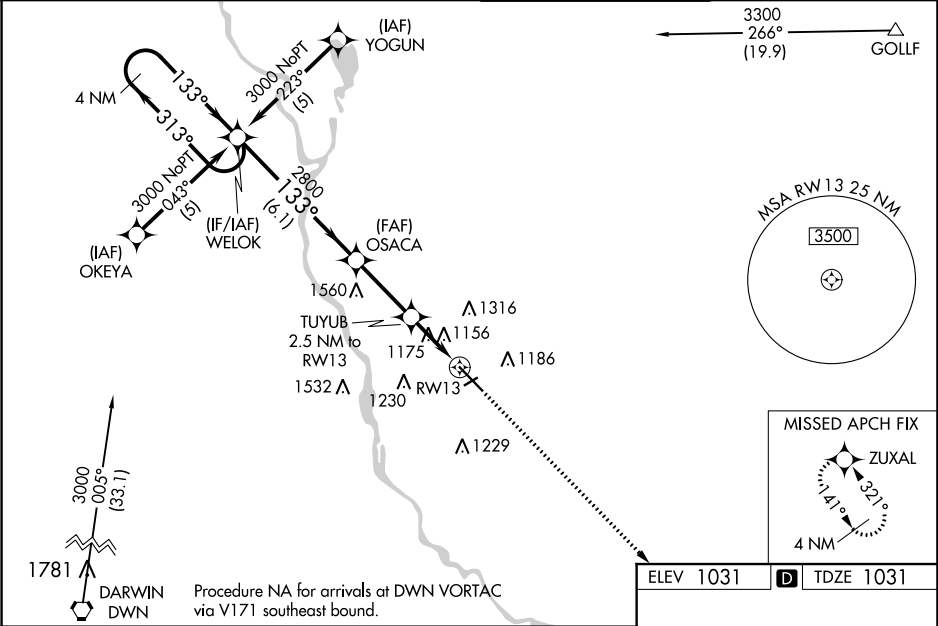

4 NM Holding Pattern		WELOK	OSACA	TUYUB 2.5 NM to RW13	1.1 NM to RW13	RW13
3000 ← 313°		→ 133°	2800	2800	1880	
GP 3.00° TCH 49			6.1 NM	2.8 NM	1.4 NM	1.1 NM
CATEGORY	A	B	C	D		
LPV DA	1231-½		200 (200-½)			
LNAV/VNAV DA	1455-1		424 (500-1)			
LNAV MDA	1440-½	409 (500-½)	1440-¾ 409 (500-¾)	1440-1 409 (500-1)		
CIRCLING	1500-1	469 (500-1)	1620-1½ 589 (600-1½)	1860-2¾ 829 (900-2¾)		

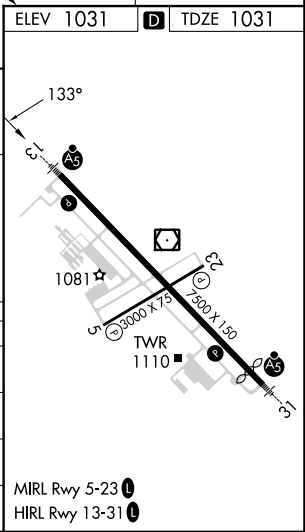

NC-1, 22 FEB 2024 to 21 MAR 2024

NC-1, 22 FEB 2024 to 21 MAR 2024