

WAAS CH 81914 W26B	APP CRS 259°	Rwy Idg 7004 TDZE 462 Apt Elev 463
--	------------------------	---

RNAV (GPS) RWY 26L

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.

▼


Baro-VNAV and VDP NA when using St Louis Lambert Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS when using St Louis Lambert Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1 3⁄8 SM and LNAV Cat C and D to 1 3⁄8 SM. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase LPV DA to 705 feet; increase LNAV/VNAV DA to 959 feet and all visibilities to RVR 5000; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500 and Circling visibility Cat C 1⁄4 SM.

*RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl altimeter setting).

MALSR

MISSED APPROACH:
Climb to 3000 direct
JOBRK and hold.

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER* 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)	UNICOM 122.95
----------------------	---	--	-------------------------	--------------------------	---	-------------------------

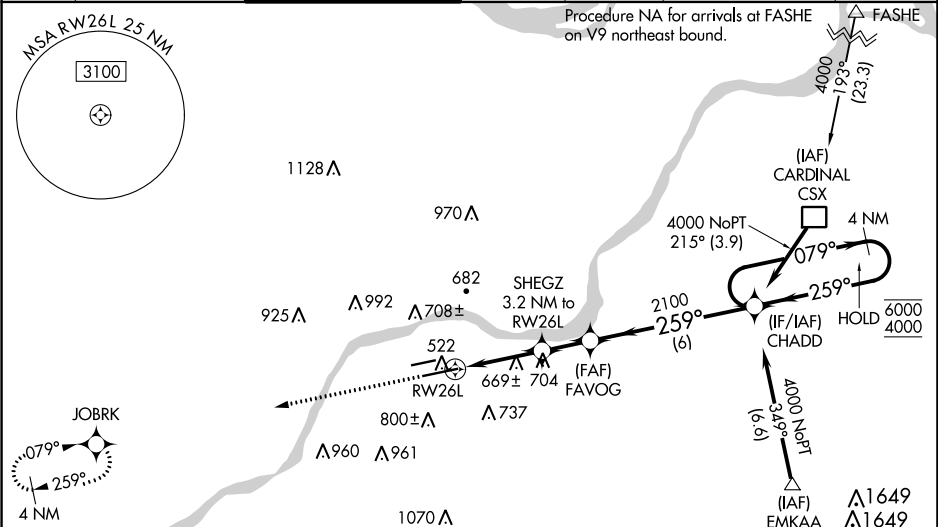

ELEV 463 **D** TDZE 462

3000 JOBRK			
SHEGZ 3.2 NM to RW26L			
1.3 NM to RW26L			
FAVOG 2100			
CHADD 4 NM Holding Pattern			
079° → 6000 4000			
GP 3.00° TCH 55			
CATEGORY	A	B	C
LPV DA*	662/24 200 (200-1⁄2)		
LNAV/VNAV DA	916/45 454 (500-7⁄8)		
LNAV MDA	920/24 458 (500-1⁄2)	920/45 458 (500-7⁄8)	
C CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1180-2 717 (800-2)
			1360-3 897 (900-3)