

APP CRS	Rwy Idg	4400
230°	TDZE	58
	Apt Elev	59


RNAV (GPS) RWY 23

SAVOONGA (SVA) (PASA)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Gambell altimeter setting and increase all MDAs 100 feet; increase LNAV Cat C/D visibility ¼ SM and Circling Cat C visibility ½ SM. Circling NA southeast of Rwy 5-23. VDP NA with Gambell altimeter setting.

MISSED APPROACH: Climbing right turn to 2600 direct RUFZA and hold.

AWOS-3P	ANCHORAGE CENTER	NOME RADIO	CTAF
121.3	132.2 281.4	122.3	122.7

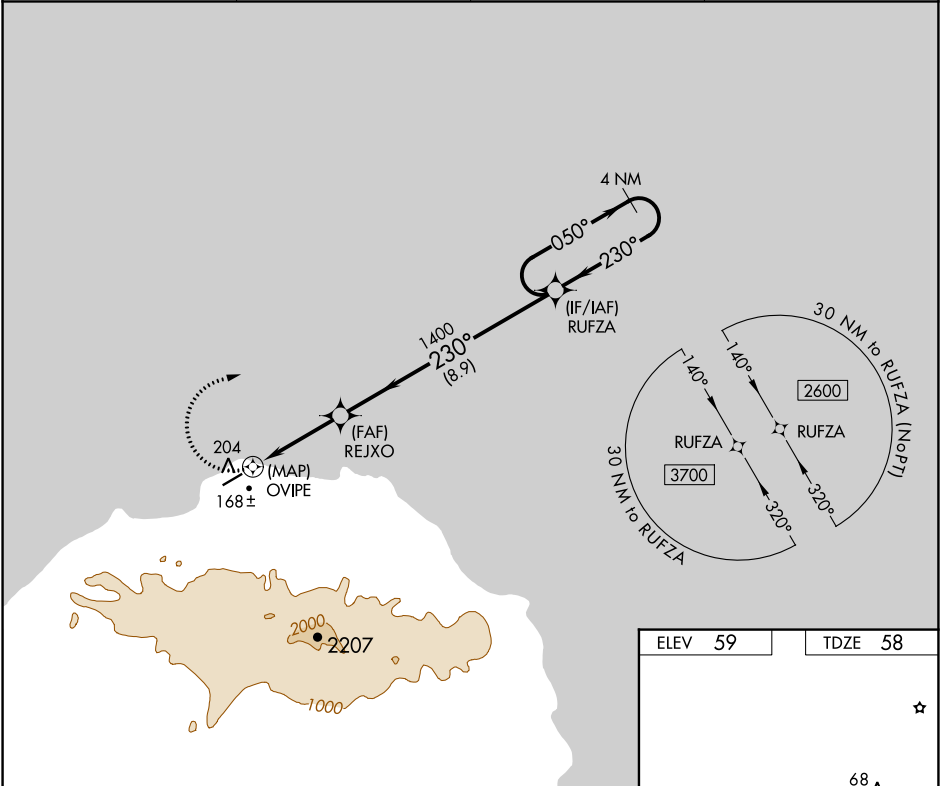

2600 RUFZA

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 24).

REJXO

0.9 NM to OVIPE

3.00° TCH 39

1400

230°

050°

2600

4 NM Holding Pattern

0.5 0.9 NM 2.7 NM 8.9 NM

CATEGORY	A	B	C	D
LNAV MDA	520-1 462 (500-1)	520-1 462 (500-1)	520-1 462 (500-1)	520-1 462 (500-1)
CIRCLING	520-1 461 (500-1)	780-2 721 (800-2)	1160-3 1101 (1200-3)	

ELEV 59

TDZE 58

68

4400 X 100

23

MIRL Rwy 5-23

AK, 25 JAN 2024 to 21 MAR 2024

AK, 25 JAN 2024 to 21 MAR 2024