

TUNICA, MISSISSIPPI

AL-9521 (FAA)

21140

WAAS CH 60912 W35A	APP CRS 347°	Rwy Idg 8500 TDZE 194 Apt Elev 194
--	------------------------	---

RNAV (GPS) RWY 35
TUNICA MUNI (UTA)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). For inop BARO, increase LNAV/VNAV all Cats visibility to ¾ mile. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Memphis altimeter setting. When local altimeter setting not received, use Memphis altimeter setting and increase LPV DA to 480, LNAV/VNAV DA to 530, and all MDA 100 feet; increase LNAV/VNAV visibility all Cats ½ mile, increase LNAV Cat C, D and Circling Cat C visibility ¼ mile. For inop MALSR when using Memphis altimeter setting, increase LPV all Cats visibility to ¾ mile.

MALSR


MISSED APPROACH:
Climb to 2800 direct
BUYAL and hold.

AWOS-3 118.075	MEMPHIS APP CON 119.1 291.6	CLNC DEL 118.9	UNICOM 123.0 (CTAF) 0
--------------------------	---------------------------------------	--------------------------	---------------------------------

MISSED APCH FIX

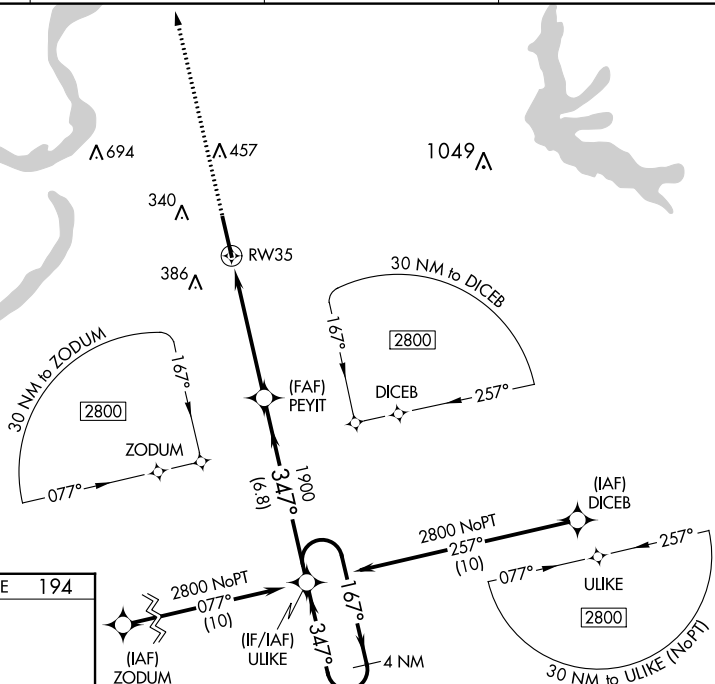

ELEV	194		TDZE	194
------	-----	--	------	-----

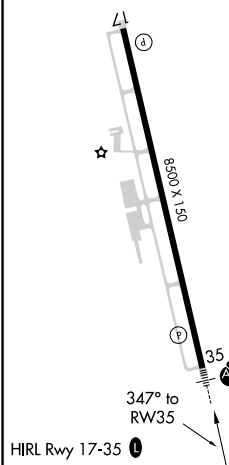

2800	BUYAL	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 47).	ULIKE	4 NM Holding Pattern
------	-------	--	-------	----------------------

* LNAV only.

*1.3 NM to

PEYIT
|
167° → 2800
← 347°

GP 3.00°
TCH 43

CATEGORY	A	B	C	D
LPV DA	394-1/2	200 (200-1/2)		
LNAV/VNAV DA	444-1/2	250 (300-1/2)		
LNAV MDA	640-1/2 446 (500-1/2)	640-7/8 446 (500-7/8)		
CIRCLING	680-1 486 (500-1)	740-1 546 (600-1)	760-1 1/2 566 (600-1 1/2)	760-2 566 (600-2)

TUNICA, MISSISSIPPI
Amdt 2B 20MAY21

34°41'N-90°21'W

TUNICA MUNI (UTA)

RNAV (GPS) RWY 35

SC-4, 22 FEB 2024 to 21 MAR 2024