

VORTAC SBY	APP CRS	Rwy Idg	8005
111.2	SBY [24.1] Arc	TDZE	38
Chan 49		Apt Elev	40


VOR/DME or TACAN RWY 10

Wallops Flight Facility (WAL)

When local altimeter setting not received, use Salisbury altimeter setting and increase all MDA 60 feet and Circling Cts C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 2000 on heading 240° and SBY VORTAC 24.1 DME Arc clockwise to MAGGO/SBY 24.1 DME and hold.

ASOS	PATUXENT APP CON ★	Wallops Tower ★	GND CON	CLNC DEL
119.175	127.95 314.0	126.5 (CTAF) 0 306.975 (CTAF) 0	127.875 269.325	121.7

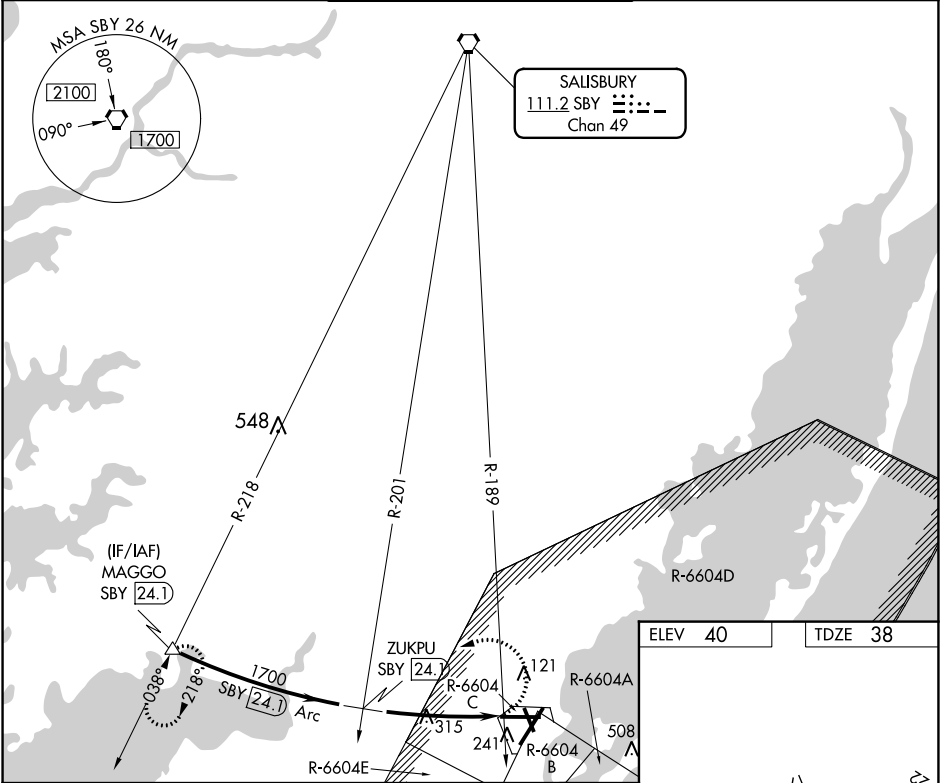

MAGGO SBY 24.1	2000	SBY 24.1 Arc	ZUKPU SBY 24.1	1700	R-189 SBY 24.1
ELEV 40 TDZE 38					
hdg 240° 8005 X 200 TWR 120 8748 X 150 35 28 12 4					
CATEGORY	A	B	C	D	
S-10	900-1¼	862 (900-1¼)	900-2½	862 (900-2½)	
CIRCLING	900-1¼	860 (900-1¼)	900-2½	900-2¾	

REIL all Rwy's	HIRL Rwy's 4-22, 10-28 and 17-35
----------------	----------------------------------