



WAAS CH 56330 W15A	APP CRS 155°	Rwy Idg TDZE Apt Elev	5201 4038 4038
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

STERLING MUNI (STK)

RNP APCH.	MISSED APPROACH: Climb to 6400 direct ANUCE and hold.
▼ ▲ Circling NA to Rwy 4 and 22. Rwy 15 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.	

AWOS-3 118.525	DENVER CENTER 118.475 225.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

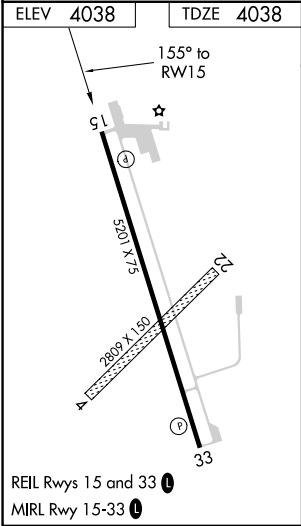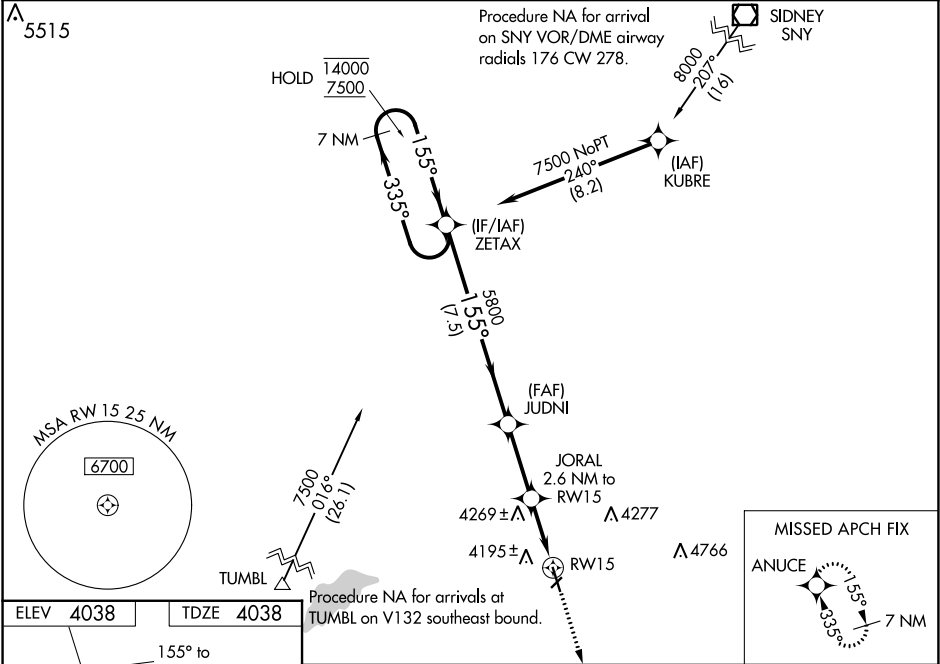

7 NM Holding Pattern		ZETAX	JUDNI	JORAL	2.6 NM to RW15	6400 ANUCE
14000 7500		335° 155°	155°	5800	*1.3 NM to RW15	*LNAV only.
GP 3.00° TCH 44		5800	*4900	RW15		
		7.5 NM	2.8 NM	1.3	1.3	
CATEGORY	A	B	C	D		
LPV DA	4288-1 250 (300-1)					
LNAV/VNAV DA	4288-1 250 (300-1)					
LNAV MDA	4480-1	442 (500-1)	4480-1⅓	442 (500-1⅓)		
CIRCLING	4520-1 482 (500-1)	4580-1 542 (600-1)	4620-1½ 582 (600-1½)	4720-2¼ 682 (700-2¼)		