

WAAS CH 72614 W05A	APP CRS 055°	Rwy Idg 5080 TDZE 360 Apt Elev 361
--	------------------------	---

RNAV (GPS) RWY 5

ENTERPRISE MUNI (EDN)


T

A

Baro-VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Use Cairns AAF (Fort Novosel) altimeter setting.

MISSED APPROACH: Climb to 2500 direct CEYLU and left turn via track 295° to HAXES and left turn via track 191° to ROTOY and hold.

AWOS-3PT 118.9	CAIRNS APP CON ★ 133.45 239.275	UNICOM 122.8(CTAF) 1
--------------------------	---	--------------------------------

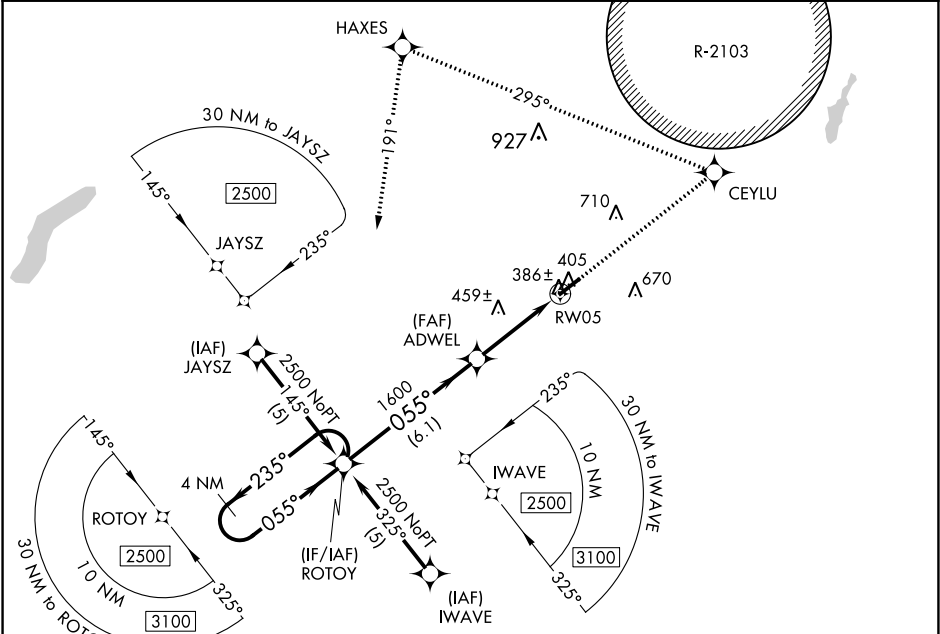

ELEV 361

TDZE 360

4 NM Holding Pattern ROTOY

2500 CEYLU tr 295°

HAXES tr 191°

ROTOY

2500 ← 235°

GP 3.00° TCH 40

055° →

055°

1600

ADWEL 1600

RW05

6.1 NM

3.8 NM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

CATEGORY	A	B	C	D
LPV DA	642-1	282 (300-1)		NA
LNAV/VNAV DA	688-1¼	328 (400-1¼)		NA
LNAV MDA	760-1	400 (400-1)		NA
CIRCLING	920-1	559 (600-1)	1100-2 739 (800-2)	NA

REIL Rwy 5 and 23 1

MIRL Rwy 5-23 1