


WAAS CH 70602 W03A	APP CRS 032°	Rwy Idg 10502 TDZE 3680 Apt Elev 3680
--	------------------------	--

RNAV (GPS) Y RWY 3
GREAT FALLS INTL (GTF)

RNP APCH - GPS.			 MISSED APPROACH: Climb to 6200 direct DEELM and on track 032° to PSHKN and hold.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 50°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.			
ATIS 126.6 269.0	GREAT FALLS APP CON 128.6 379.175	GREAT FALLS TOWER 118.7 282.2	GND CON 121.7 348.6
			CLNC DEL 121.7 348.6

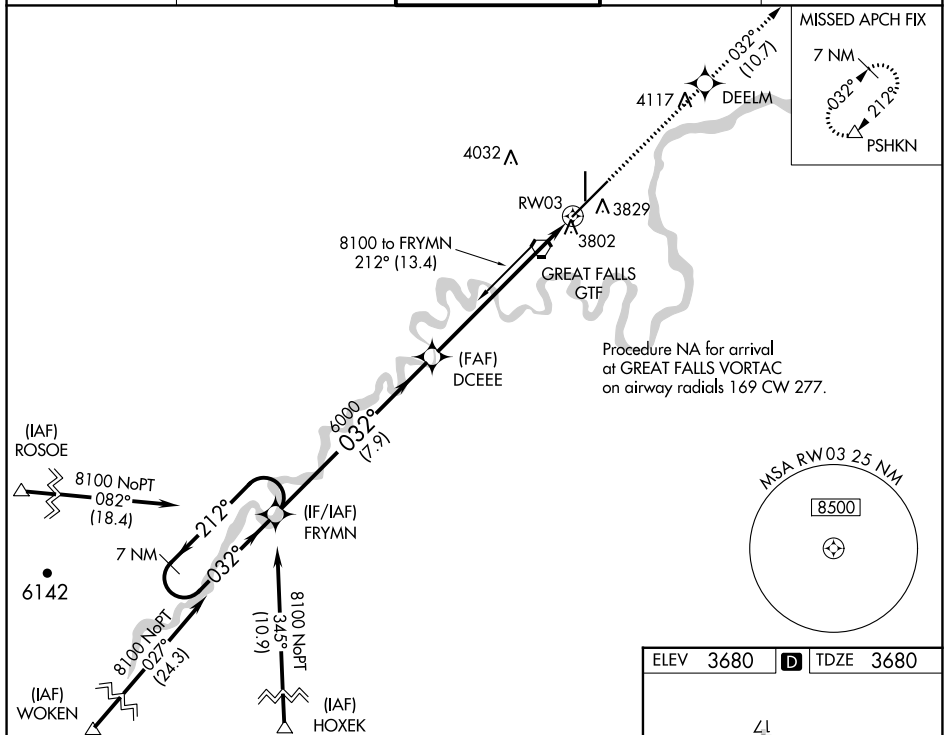

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).					6200 ↑		DEELM ✦		tr 032° ↗		PSHKN △				
7 NM Holding Pattern FRYMN					DCEEE										
8100 ←212° 032°→					*1.2 NM to RW03 RW03										
GP 3.00° TCH 54					6000 6000										
					7.9 NM		5.9 NM		1.2 NM						
CATEGORY		A		B		C		D							
LPV DA		3880/18 200 (200-½)													
LNAV/ VNAV DA		3963/24 283 (300-½)													
LNAV MDA		4140/24 460 (500-½)						4140/45 460 (500-¾)							
CIRCLING		4140-1 460 (500-1)						4340-1¾ 660 (700-1¾)				4420-2¼ 740 (800-2¼)			